

TRANSFER BELT CONVEYOR


To sort manually &
continuously
nonconformity

ELECTRICAL DATAS:

Comply with the EEC standards,

Power supply: 380 V olts 3phases,

Power from 0.18 to 0.55 Kw.

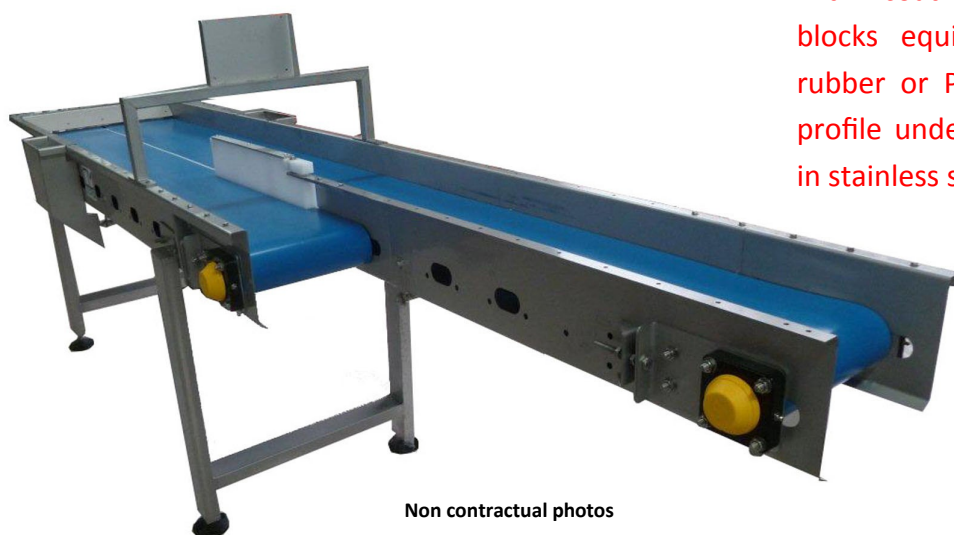

Non contractual photos

OPTIONS:

Bins for wastes

Waste are canalized

Washing tunnel

Frequency converter for variable speed

Special belt

OPERATING:

Various lengths, widths and heights
adapted to your environment

To sort manually your shellfishes or
to simply transfer

low maintenance

Suits your environment

1 or 2 belts

Adjustable feet

Belt with guiding profile

Strongly built

BUILDING:

Stainless steel shafts, PVC cylinder
with coating, plastic plummer
blocks equipped with greasers,
rubber or PVC belt with guiding
profile underneath, strongly built
in stainless steel



0033 516 353 082

www.cmagro.fr